

ROMAN BLINDS



Hardware Specification Overview

Roman Blinds

Cordlock and pulley system mounted on lacquered headrail.
'No-Sew' aluminium battens with self-aligning cords.

Durability

The color fastness of the fabric is 6 to 7 Blue Scales (where maximum score is 7) (AS 2001.4.21)

The aluminium battens are unaffected by moisture and corrosion resistant.

The operating hardware has been cycle tested to ensure long term performance.



Energy Benefits

Window treatments that are tight fitting to the window and made from closely woven fabrics, provide one of the most effective ways to prevent heat transmittance through windows.

Roman Blinds can be fitted in the window reveal and have no gaps between panels that would otherwise allow warm air to escape. Select a blackout or room darkening fabric, with a white or light colour facing the window for optimum energy performance. Extraflocke fabrics come in a range of colors; some specifically selected for the Commercial environment and have a neutral flocked backing for superior heat rejection.

Environmental and Employee Benefits

Fabrics can be selected to give building occupants the optimum combination of light and heat control, privacy and view to the outside. The ease of operation of Roman Blinds puts all users in complete control of their environment.

New Zealand Window Shades operates under an Environmental Management System that actively works towards waste and emission reduction and maximizing the use of recycling.

Roman Blinds bring casual styling to any window. The choice of fabrics is extensive, ranging from blockouts to the latest developments in light-controlling Sunscreens. A range of decorator options gives the Interior Designer artistic freedom to create a space that reflects their individuality.

Fire Retardant

Several fabrics are suitable for use in Class 2-9 buildings except in Fire Isolated Exits, in accordance with the Building Code of Australia. Please ask about the fire properties of the fabric of

Color Range

There are 7 ranges of fabric in the Roman Blinds collection.

- Landscape
- Extraview Plus your choice.
- Extraflocke
- Seascape
- Allure
- Mist
- Urban Shade

Quality

The supplier of Roman Blind fabrics and components to NZWS, is a quality endorsed company, certified as complying with the requirements of AS/NZS ISO 9001:2000.

Commercial Warranty

All Roman Blinds are covered by a 1 year Commercial Warranty. Conditions apply

Applications

Internal installations where heat, light and/or privacy control are required,

Example: offices, board rooms and common areas.

Installation, where a casual styling or home-like feel is sought.



Transparent Sunscreen



Semi Transparent Mist



Dim-out Seascape



Blockout Extraflocke

Fabric Specification Overview

All Roman Blade fabrics are 100% polyester or polymer coated fibre glass.

Many are treated with TEFLON Fabric Protector and SANITIZED Antimicrobial Protection.

FEATURES


'No-sew' Design

The method of manufacture ensures that panels are always parallel and there are no pin holes of light visible in blackout fabrics. Aluminium battens are color co-ordinate with the rear face of the fabric.



Fade-protected Design

The folding panel arrangement of Roman Blinds ensures that the front face of the fabric is protected from harmful UV rays, even when the blind is raised. Each extrusion hangs slightly lower than the previous one to minimize the stack depth when the shade is raised. Stack depth is 280mm

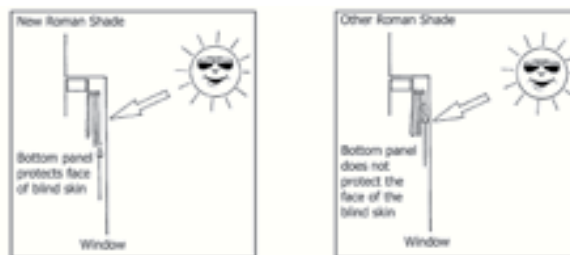

Lacquered Headrail

The operating mechanism of Roman Blinds is attached to a lacquered timber headrail.

The color is co-ordinate with the fabric, for a less obtrusive appearance and the lacquer coating protects the timber from the ingress of moisture.

Cord Location

Roman Blinds are manually operated using cords located at the front of the blinds. Unlike Roman Blinds with rear located operating cords, this ensures that the user does not have to reach around the back of the blind to open it (which usually causes damage to the fabric over time). Additionally, the cords are not inclined to rub against the edge of the fabric during raising and lowering, which can cause the fabric to fray. Cords are finished with color co-ordinate tassels. The blind is held in the raised position with a positive action cordlock.



Valance or Pelmet

Roman Blinds are finished with an integrated valance. This serves the function of covering the operating hardware and provides a neat finish to the blind. The hardware is therefore hidden from both the interior and exterior view, unlike some other roman shade designs.



Valance Front View



Cedar Pelmet

Optional 70mm Cedar pelmet is available with a further option of mitred returns.

Motorization

Roman Blinds can also be motorized. They can be controlled by switch, remote control or operation by C-Bus or building management systems. Blinds can be operated individually or via group controls.

Trim Options



Cedar Bottom Rail (Optional)



Aluminium Bottom Rail (Standard)



Aluminium Battens (Front View)





- Window Blinds
- Pool Covers
- Motorized Gates
- Folding Doors
- Roller Shutters & Grills
- Raised Floorings
- Sunshades
- False Ceilings
- Specialized Fly Screens
- Awnings