


CALCIUM SULPHATE RAISED ACCESS FLOORING SYSTEM

Calcium Sulphate PVC sealed panels consist of recycled Calcium Sulphate core sealed with a heavy duty ABS and galvanized steel bottom. These panels are environmentally protecting, waterproof, rot proof, fireproof (Class "A" flame spread rating) and provide excellent rigidity, load rating, durability, and acoustic and static performance. The Calcium Sulphate panel is sealed US wood-core compatible without the susceptibility to humidity, temperature, expanding wood core, and de-lamination of the standard wood-core system.

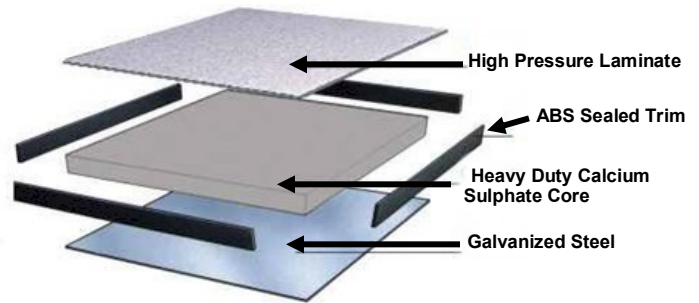


APPLICATIONS

Calcium Sulphate Systems meet the needs of a wide range of applications from office environments to equipment applications such as data centers, telecommunication, and mission critical facilities.


FLOOR UNDERSTRUCTURE

Calcium Sulphate Raised Floor Systems are available with Bolted Stringer and Stringerless Drop & Lock Understructure Systems which can accommodate floor heights as low 3" and as high as 72".

Bolted Stringer



Stringerless Drop & Lock



FLOOR FINISHES


Calcium Sulphate Raised Floor Systems are available with High Pressure Laminate and Vinyl (custom order).

AIRFLOW PANELS

55% High Output



32% Standard Airflow




Calcium Sulphate Raised Floor Systems offer Airflow Panels ranging from 18% airflow to 66% airflow.

Bottom Panel View

Top Panel View

 Industry Standard [Cheyenne Gray](#) Finish

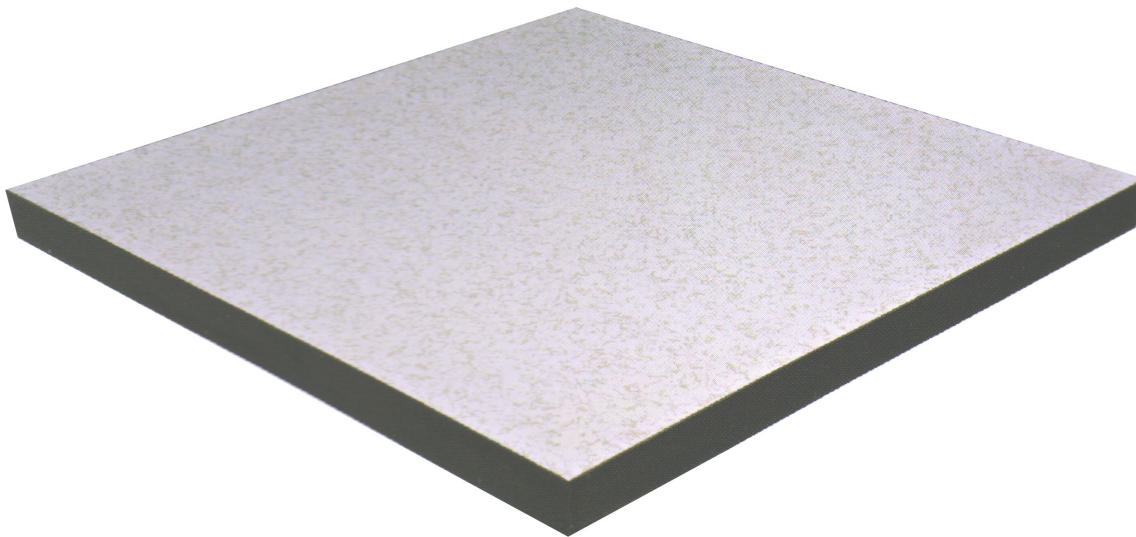Top Side Panel View

CALCIUM SULPHATE PANEL LOAD


	Static	Ultimate	Ultimate	System	Rolling Load	Rolling Load
	Load (lbs)	Load (lbs)	Impact (lbs)	Weight (lb/ft ²)	10 Pass (lbs)	10K Pass (lbs)
1250	1250	3400	670	7.6	1250	875

All Flooring systems are independently tested and certified to meet the standards of PSA MOB PF2: 1992 Platform Floors (Raised Access Floors) performance specification and CISCA 2003-2004, Recommended Test Procedures for Access Floors.




3773 Howard Hughes Parkway • Suite 500S • Las Vegas, NV 89169 • www.proaccessfloors.com
 Text - 858-566-9000 • Fax - 858-566-4000 • Phone - 858-566-9000

Bottom Panel View

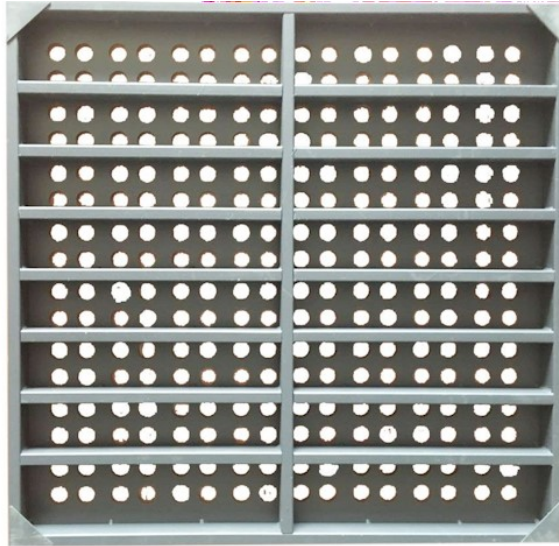

Top Panel View

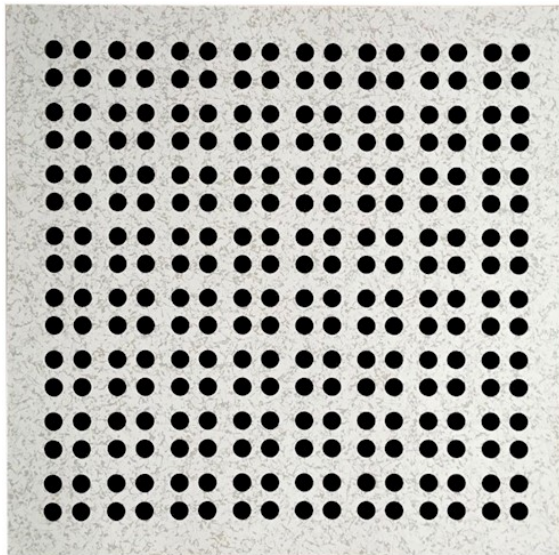Industry Standard [Cheyenne Gray](#) Finish

STANDARD 32% AIRFLOW PANEL LOAD RATING

	Ultimate Load (lbs)	Concentrated Load		Impact Load (lbs)	Rolling Load 10 Pass (lbs)	Rolling Load 10K Pass (lbs)
		0.100" Deflection (lbs)	0.080" Deflection (lbs)			
1250 Bolted Stringer	1000	1000	1000	150	-	-

All Flooring systems are independently tested and certified to meet the standards of PSA MOB PF2: 1992 Platform Floors (Raised Access Floors) performance specification and CISC A 2003-2004, Recommended Test Procedures for Access Floors.



Bottom Panel View



Top Panel View



Bottom Side Panel View



[Click for additional information on the 55% Universal Airgrate](#)

UNIVERSAL HIGH OUTPUT 55% AIRGRATE LOAD RATING

	Concentrated Load				
	Ultimate	0.100"	0.010"	Impact	Rolling Load
	Load (lbs)	Deflection (lbs)	Deflection (lbs)	Load (lbs)	10 Pass (lbs)
55% Airgrate Bolted Stringer	4000	1500	1500	150	1000

All Flooring systems are independently tested and certified to meet the standards of PSA MOB PF2: 1992 Platform Floors (Raised Access Floors) performance specification and Cisca 2003-2004, Recommended Test Procedures for Access Floors.



3773 Howard Hughes Parkway • Suite 500S • Las Vegas, NV 89169 • www.proaccessfloors.com
Text - 858-566-9000 • Fax - 858-566-4000 • Phone - 858-566-9000